

**SPECIFICHE DI UTILIZZO**


Temperature di utilizzo dell'acqua calda:  
 Massima: 85°C  
 Minima: 5°C più alta di quella minima richiesta come miscelata.  
 Consigliata 65°C  
 Minima differenza tra temperatura calda e fredda 10°C  
 Pressioni di esercizio  
 Massima: 5 Bar  
 Minima: 0.1 Bar  
 Le pressioni di utilizzo dovrebbero essere mantenute il più bilanciate possibile per ottenere il massimo dell'efficienza.  
 Quando le pressioni in entrata sono superiori a 5 Bar, dei riduttori di pressione dovrebbero essere installati a monte del miscelatore.

**GENERAL CHARACTERISTICS**


In the case of instantaneous heaters, hot water flow has to at least meet the minimum flow required by heater and maintain burning.  
 (Specified by heater manufacture)  
**OPERATING SPECIFICATIONS**  
 Hot water supply temperature:  
 Maximum: 85°C  
 Minimum: 5°C Higher than maximum required mixed temperature.  
 Advisable 65°C.  
 Minimum difference between hot and mixed temperature is 10°C.  
 Operating Pressure  
 Maximum 5 Bar  
 Minimum 0.1 Bar  
 Operating pressure (on hot and cold line) should be kept as balanced as possible in order to assure maximum efficiency.  
 When the pressure is higher than a 5 Bar a pressure reducer is required To be fitted before valve.

  
 IN F.3/4"G.  
 FREDDA - COLD

  
 IN F.3/4"G.  
 CALDA - HOT

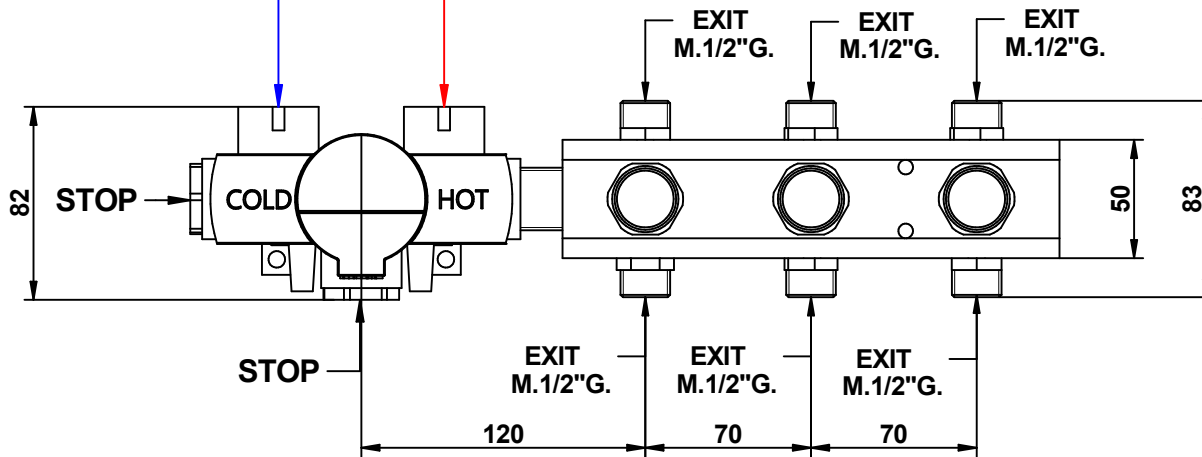

**PORTATE A PRESSIONE DINAMICA SENZA LIMITATORE**  
**FLOW RATES AT DYNAMIC PRESSURE WITHOUT LIMITATION SYSTEM**

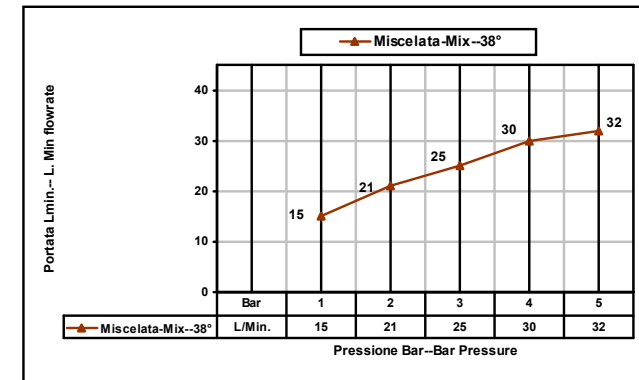

**Cod. 09730/3**

**Corpo incasso per art.: Built-in body for items:**  
**32-43-06-65-66-11-12-04-05-02542/03**

© Copyright of Mario Bongio s.r.l.

**bongio**

Mario Bongio s.r.l.  
 Via Aldo Moro, 2  
 28017 San Maurizio d'Opaglio (NO) - Italy  
 tel: +39 0322 967248 fax: +39 0322 950012  
 www.bongio.com