

Rain shower for surface-mounted ceiling installation with light 300 mm

28 032 970



Fits: TARA, LISSÉ, VAIA, META

- rain shower Ø 300 mm
- Rain flow, max. flow rate 12 l/min
- Spray flow, max. flow rate 6 l/min
- Distance to ceiling from bottom edge of shower 40
- with anti-scale system
- central LED Spot 3000 K
- Provided by customer: Light switch
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB, WELL

 Not suitable for use in a steam bath
- includes light bulbs with a Class F energy efficiency

includes light bulbs with a Class F energy efficiency

Chrome	28 032 970-00
Brushed Platinum	28 032 970-06
Platinum	28 032 970-08
Matte White	28 032 970-10
Dark Chrome	28 032 970-19
Brushed Durabrass (23kt Gold)	28 032 970-28
Matte Black	28 032 970-33
Brushed Champagne (22kt Gold)	28 032 970-46
Champagne (22kt Gold)	28 032 970-47
Brushed Chrome	28 032 970-93
Brushed Dark Platinum	28 032 970-99

Required miscellaneous




Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light

- •min. recess depth 90 mm
- •max. recess depth 115 mm
- Provided by customer: Light switch
 Not suitable for use in a steam bath





Rain shower for surface-mounted ceiling installation with light 300 mm

28 032 970




Flow rate chart







28 032 970

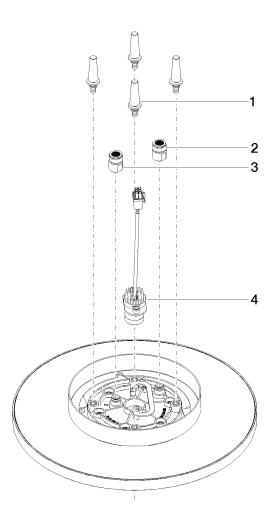

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1	2
2	90 24 03 309 01 90	connection	1	2
3	90 24 03 309 00 90	connection	1	2
4	90 10 01 225 00 90	electronic accessories	1	2